

VEILIGHEIDSGORDELS EN
VASTZETSYSTEMEN

SBS veiligheidsgordels



Reken op ons.

Auerhaan Lelystad is een bedrijf met een zeer lange historie; opgericht in 1885, is het bedrijf een bekende en betrouwbare toeleverancier van producten voor de carrosseriebouw, busbouw, machinebouw, scheepsbouw en jachtbouw. Vele vertegenwoordigingen van gerenommeerde fabrikanten in Europa en daarbuiten maken het productassortiment van Auerhaan tot een zeer breed programma. Het mag u dan ook duidelijk zijn dat de informatie die wij u geven via deze website nooit compleet kan zijn.



- Anchor plates
- Buckles
- Components
- Pet products
- Pillar loops
- Retractors
- S hooks
- Snap hooks
- Tongues
- Tow straps
- Webbing



CONSTRUCTION & LIFT TRUCKS



EMERGENCY VEHICLES




LEISURE RIDES & ATTRACTIONS



MILITARY



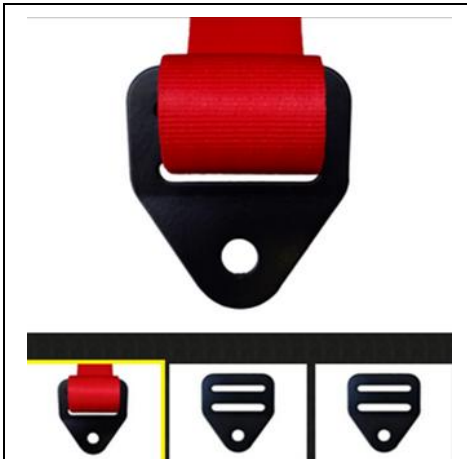

Part No: 40-0542-00

A double slotted anchor plate:

- 3mm thick
- Finish: Black painted
- Hole Diameter: 11.6mm



Part No: 40-0117-01

- Tensile Strength: minimum 15Kn
- Finish Black electro phoretic
- Webbing size 46 - 50mm
- Fixing Hole Diameter: 15mm
- Cranked 25 degrees



Part No: AP41

- 4mm thick
- 27 degree crank / bend
- Hole diameter 15.5mm
- Finish: Black paint
- Tensile Strength: minimum 19.6Kn



Part No: AP42

- 4mm thick
- 27 degree crank / bend
- Hole diameter 11.5mm
- Finish: Black paint
- Tensile Strength: minimum 19.6Kn



Part No: AP43

- 4mm thick
- Flat
- Hole diameter 15.5mm
- Finish: Black paint
- Tensile Strength: minimum 19.6Kn

Anchor plates



Part No: AP44

- 4mm thick
- Flat
- Hole diameter 11.5mm
- Finish: Black paint
- Tensile Strength: minimum 19.6Kn



Part No: 2006100A

- 3.5mm thick
- 90° bend
- Hole Diameter 12.3mm
- Finish - Black Paint
- Tensile Strength - Minimum 18Kn



Part No: 40-0703

- 4mm thick
- Flat
- Hole diameter 13.3mm minimum
- Finish: Black paint
- Tensile Strength: minimum 15Kn



Part No: 40-1735

- Black
- 90° bend



Part No: 2201-010-00A

Buckle Blade Assembly (Autoliv K12G)

- Length 132mm
- Rigid steel blade mounted with double bend
- Fixing hole diameter 11.3mm



Part No: 2201-140-00A

Buckle Blade Assembly (Autoliv K12G)

- Length 140mm
- Rigid steel blade mounted
- Fixing hole diameter 11.2mm




Part No: 2301-350-00A

- Buckle Stalk Assembly (Autoliv K12G)
- Length 350mm
- Flexible wire stalk
- Fixing hole diameter 11.6mm



Part No: 2201-090-50A

- Buckle Blade Assembly (Autoliv K12G)
- Length 90mm
- Rigid steel blade mounted
- Fixing hole diameter 11.2mm
- Orange push button marked with PRESS

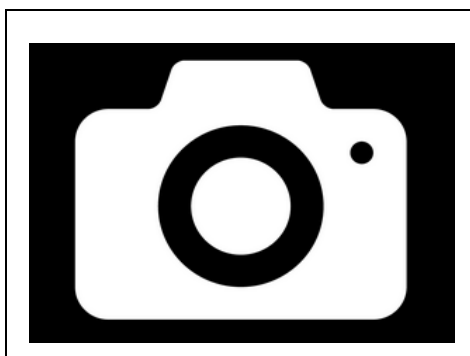


Part No: 20-1560-00

A centre push buckle with tongue ejection, available with adjuster tongues to suit 38mm or 50mm webbing.


- Buckle Part No. 20-1560-00
- 38mm Tongue No. 20-1561-00
- 50mm Tongue No. 20-1562-00
- Strength: minimum 10Kn

Buckles

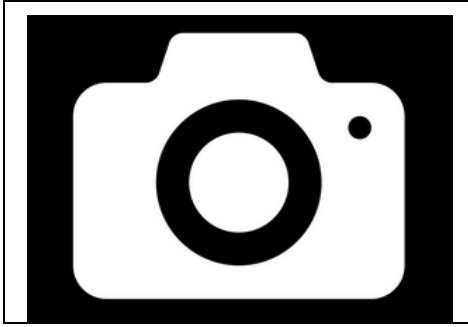

Part No: 63-4958-00A

- Child Buckle and 2 Tongues
- Designed for use with 38mm webbing
- Buckle Part No.63-4958-00A

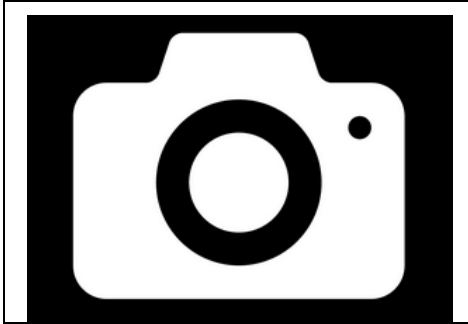

Part No: 70-1311-00

A webbing buckle with plastic sleeve. Can be made to length to suit customer requirements.

- Anchor plate cranked down
- Length 250-385mm



Part No: 2201-181-00A

Buckle Blade Assembly (Autoliv K12G)

- Length: 181mm
- Rigid steel blade mounted
- Fixing hole diameter: 11.2mm



Part No: 2201-140-01A

Buckle Blade Assembly (Autoliv K12G)

- Length: 140mm
- Rigid steel blade mounted
- Fixing hole diameter: 14.5mm



Part No: 2201-125-00A

Buckle Blade Assembly (Autoliv K12G)

- Length: 125mm
- Rigid steel blade mounted
- Fixing hole diameter: 8.2mm



Part No: 2201-115-01A

Buckle Blade Assembly (Autoliv K12G)


- Length: 115mm
- Rigid steel blade mounted
- Fixing hole diameter: 14.5mm



Part No: 2201-090-00A

Buckle Blade Assembly (Autoliv K12G)

- Length: 90mm
- Rigid steel blade mounted
- Fixing hole diameter: 11.2mm

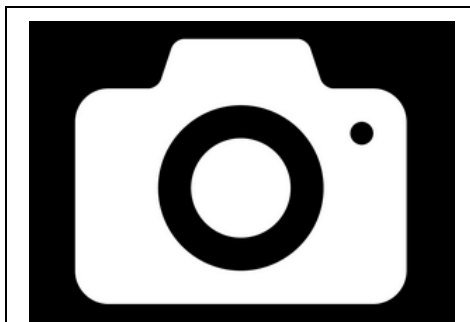

Part No: 20-0311-00

Buckle Blade Assembly (Autoliv K12G)


- Length: 140mm
- Rigid steel blade mounted
- Fixing hole diameter: 15mm



Part No: 20-0289-00A

Buckle head assembly (Autoliv K12G)

- Designed to be attached to webbing
- Use in conjunction with edge protector 20-0271-00

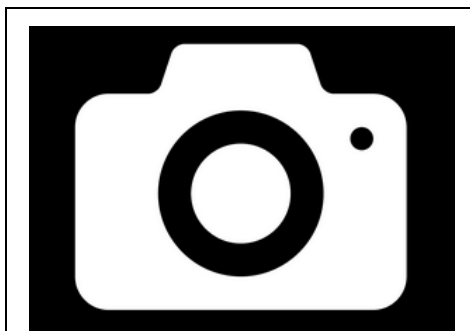


Part No: 20-0289-01A

Buckle head assembly (Autoliv K12G)

- Designed to be attached to webbing.
- Use in conjunction with edge protector 20-0271-00
- Push button has the word PRESS on the end

Buckles

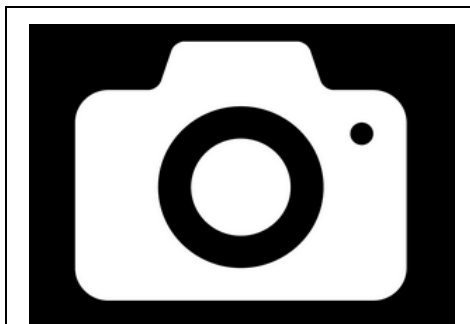

Part No: 2301-430-R0A

Buckle stalk assembly (Autoliv K12G)

- Length: 430mm
- Flexible wire stalk
- Fixing hole diameter: 11.5mm
- Foot ferrule angle: 70°



Part No: 2301-430-L0A

Buckle stalk assembly (Autoliv K12G)

- Length: 430mm
- Flexible wire stalk
- Fixing hole diameter: 11.5mm
- Foot ferrule angle: 70°



Part No: 2301-005-00A

Buckle stalk assembly (Autoliv K12G)

- Length: 264mm
- Flexible wire stalk
- Fixing hole diameter: 11.5mm
- Foot ferrule angle: 50°



Part No: 2301-004-00A

Buckle stalk assembly (Autoliv K12G)

- Length: 264mm
- Flexible wire stalk
- Fixing hole diameter: 11.5mm
- Foot ferrule angle: 50°



Part No: 2301-450-00A

Buckle stalk assembly (Autoliv K12G)

- Length: 450mm
- Flexible wire stalk
- Fixing hole diameter: 11.5mm
- Foot ferrule angle: Flat



Part No: 2301-300-00A

Buckle stalk assembly (Autoliv K12G)

- Length: 300mm
- Flexible wire stalk
- Fixing hole diameter: 11.5mm
- Foot ferrule angle: Flat



Part No: 2301-001-00A

Buckle stalk assembly (Autoliv K12G)

- Length: 250mm
- Flexible wire stalk
- Fixing hole diameter: 11.5mm
- Foot ferrule angle: Flat



Part No: 20-0272-00A

Buckle head assembly (Autoliv K12G) on a steel tang

- Designed to be attached to webbing
- Use in conjunction with edge protector 16922018B



Part No: 2301-193-00A

Buckle stalk assembly (Autoliv K12G)

- Length: 193mm
- Flexible wire stalk
- Fixing hole diameter: 11.5mm
- Foot ferrule angle: Flat




Part No: 2301-162-00A

Buckle stalk assembly (Autoliv K12G)

- Length: 162mm
- Flexible wire stalk
- Fixing hole diameter: 11.5mm
- Foot ferrule angle: Flat

Buckles

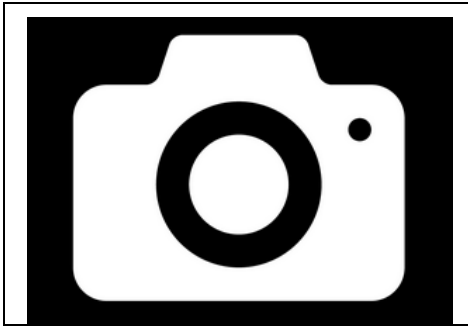

Part No: NOCODE4

SBS webbing buckles are available in static and adjustable form, in lengths to suit customer requirements using various end attachments.

Part No: On Request

Sleeves available to add rigidity.



Part No: 2201-015-00A

Buckle Blade Assembly (Autoliv K12G).

- Rigid steel blade mounted
- 90 degree bend
- Fixing hole diameter: 11.2mm

Equivalent to LDV part number 280060-01



Part No: 2201-014-00A

Buckle Blade Assembly (Autoliv K12G).

- Rigid steel blade mounted
- 90 degree bend
- Fixing hole diameter: 11.2mm

Equivalent to LDV part number 280060-01



Part No: 20-0101-00

Mini Buckle

Centre push button release buckle with durable polypropylene cover.



Part No: 347178C

Tongue Stop: a two piece webbing guide for positioning the tongue.

This product may be fitted retrospectively.



Part No: 90-0159-00

- 3 bar adjuster designed to accept up to 50mm webbing
- Finish: Black painted
- Strength: minimum 14.7Kn



Part No: 50-0215-00

- Black plastic adjustable tongue stop
- Slide along webbing to required position

Components



Part No: 10-1443-00

AGB93 (M1) Standard Wound Retractor

- Double Sensitive
- WS/CS
- Installation Angle 120-90 (30 degrees right)
- Strength
 - 450mm > 15KN
 - 0mm > 15KN
- Weight 300g
- Cover Option 50-1785-00
- Webbing Pin 10-0343-00



Part No: 50-0253-00

Plastic Sleeve

A moulded sleeve designed for 50mm webbing, can be supplied cut into lengths up to 300mm.



Part No: 60-0765-01

Re-inforcing Plate

- 65mm x 30mm x 3mm
- 7/16"UNF nut
- Zinc Plated



Part No: 60-0765-00

Re-inforcing Plate

- 55mm x 55mm x 2mm
- 7/16"UNF nut
- Zinc Plated



Part No: 60-0185

Re-inforcing Plate

- 25mm x 50mm x 6mm
- 7/16"UNF nut
- Zinc Plated



Part No: 40-0336-00

Retractor mounted bracket

- 4.5mm thick
- Fixing hole diameters: 11.5mm
- Anti-rotation feature diameter: 6.6mm



Part No: 40-0193-00

Right angled mounted bracket

- 4.5mm thick
- Fixing hole diameters: 12.7mm



Part No: 50-0114-00

Webbing Tidy

Designed for 50mm webbing.



Part No: 13937

Clix Car Safe Medium / 60-75cm (Chest Measurements)
Border Collie/Corgi

The CLIX CarSafe harness has been developed to provide safety and comfort for your dog, both in the car and whilst walking.

Soft neoprene padding covers all points of contact to ensure maximum protection and comfort, with particular focus on the central chest protector. The unique 'X-Cross' design provides an extremely comfortable and ergonomic fit, whilst ensuring the harness remains in the optimum position, even whilst moving. The CLIX CarSafe harness is made from approved safety-standard seat-belt material and has been designed in a continuous loop, to ensure that in the unfortunate event of an accident, maximum strength is retained. Fitting and use are easy, thanks to the double-sided adjustable buckles; the harness clips together without the need to manipulate the dog's legs. The harness can be securely attached by either plugging straight into the seat-belt socket or by sliding the seat-belt through the harness.



Part No: 13917

Clix Car Safe Small / 55-65cm (Chest Measurements)
Jack Russel/Westie

The CLIX CarSafe harness has been developed to provide safety and comfort for your dog, both in the car and whilst walking.

Soft neoprene padding covers all points of contact to ensure maximum protection and comfort, with particular focus on the central chest protector. The unique 'X-Cross' design provides an extremely comfortable and ergonomic fit, whilst ensuring the harness remains in the optimum position, even whilst moving. The CLIX CarSafe harness is made from approved safety-standard seat-belt material and has been designed in a continuous loop, to ensure that in the unfortunate event of an accident, maximum strength is retained. Fitting and use are easy, thanks to the double-sided adjustable buckles; the harness clips together without the need to manipulate the dog's legs. The harness can be securely attached by either plugging straight into the seat-belt socket or by sliding the seat-belt through the harness.



Part No: 24249

Mikki Large

The Mikki Car Harness ensures safe and comfortable car journeys for you and your dog. The chest belt is padded to offer maximum protection and the clever swivel-link allows your dog to turn around without getting tangled. The harness can be left on whilst you exercise your dog by simply clipping your lead onto the D-Ring on the harness.



Part No: 25258

Mikki Medium

The Mikki Car Harness ensures safe and comfortable car journeys for you and your dog. The chest belt is padded to offer maximum protection and the clever swivel-link allows your dog to turn around without getting tangled. The harness can be left on whilst you exercise your dog by simply clipping your lead onto the D-Ring on the harness.



Part No: 25247

Mikki Small

The Mikki Car Harness ensures safe and comfortable car journeys for you and your dog. The chest belt is padded to offer maximum protection and the clever swivel-link allows your dog to turn around without getting tangled. The harness can be left on whilst you exercise your dog by simply clipping your lead onto the D-Ring on the harness.



Part No: 40-0589-00

Low friction over moulded pillar loop

- Tensile Strength: minimum 15Kn
- To be used with the following shouldered bolts:
- 60-0590-00 (28.5mm thread length)
- 60-0590-01 (19.8mm thread length)
- 60-0590-03 (35mm thread length)



Part No: 556096500A

Low friction over moulded pillar loop

- Tensile Strength: minimum 20Kn
- Various hardware options.



Part No: 40-0145-00

Wire Pillar Loop

- Tensile Strength: minimum 20Kn
- Width: 76mm
- Wire diameter: 7.1mm
- Finish: black painted
- Hole diameter: 15.1mm
- Angle: 30 degrees



Part No: 10-1443-00

AGB93 (M1) Standard Wound Retractor:

- Double Sensitive
- WS/CS
- Installation Angle 120-90 (30 degrees right)
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Weight 300g
- Cover Option 50-1785-00
- Webbing Pin 10-0343-00



Part No: 10-1443-01

AGB93 (M1) Standard Wound Retractor:

- Double Sensitive
- WS/CS
- Installation Angle 60-90 (30 degrees left)
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Weight 300g
- Cover Option 50-1785-00
- Webbing Pin 10-0343-00

Retractors



Part No: 10-1467-01

AGB95 (M1) Standard Wound Retractor:

- Dual sensitive retractor
- Double Sensitive
- WS/CS
- Installation Angle 90-90 (vertical)
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Weight 300g
- Cover Option 543526C
- Webbing Pin 10-0181-00



Part No: 903165

Blade ALR with release lever:

Blade ALR with manual release lever, complete with 5 panel webbing and tongue stop.

Length: 1130mm




Part No: 5300.115.BLK

Automatic locking retractor (ALR) with metal blade mounting for seat fixing, complete with webbing.

Blade Mounted ALR:

- Length: 1200mm
- Fixing Hole Diameter: 12mm
- Protective PVC cover to fit all standard ALRs
- Available in black - other colours on request

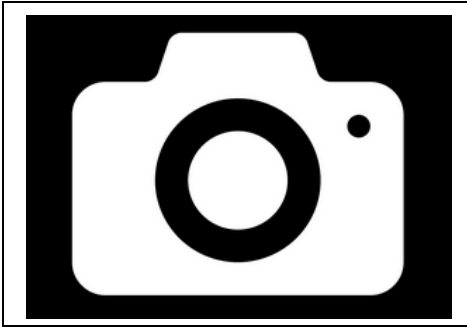

Part No: NOCODE2

KC2.1web locker retractor

Installation angle: 0/0 (Vertical)

A web locker is a retractor that uses a clamp to stop the webbing in addition to the locking mechanism. This dramatically reduces film spool effect.



Part No: 1301-006-00A

R200 (M1) Standard Wound Retractor:

- Double Sensitive
- WS/CS
- Strength:
 - 450mm > 15Kn
 - 0mm > 15Kn
- Cover Option 550625400A
- Webbing Pin 550786600A



Part No: 1301-003-00A

R200 Electric Retractor:

- Mono Sensitive
- WS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Guide 550651300D
- Cover Option 550625400A
- Webbing Pin 550786600A



Part No: 620412400A

R200 Electric Retractor:

- Mono Sensitive
- WS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Guide 550651300D
- Cover Option 550625400A
- Webbing Pin 550786600A

Retractors



Part No: 603920700C

R27 (M1) Reverse Wound Retractor:

- Double Sensitive
- WS/CS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Guide / Covers 601023100A
- Webbing Pin 10-0181-00



Part No: 627549500C

R27 (M1) Reverse Wound Retractor:

- Double Sensitive
- WS/CS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Guide 561149310B
- Webbing Pin 10-0181-00



Part No: 616778300C

R27 (M1) Standard Wound Retractor:

- Double Sensitive
- WS/CS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Capacity 2200mm / 1.25mm
- Webbing Guide Integral
- Weight 295g
- Cover Option:
 - Smart cover 609441600A
 - Full cover 615118400B
- Webbing Pin 10-0181-00



Part No: 600662000G

R27 (M1) Standard Wound Retractor:


- Double Sensitive
- WS/CS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Capacity 2200mm / 1.25mm
- Webbing Guide Integral
- Weight 295g
- Cover Option:
 - Smart cover 609441600A
 - Full cover 615118400B
- Webbing Pin 10-0181-00



Part No: 600662100G

R27 (M1) Standard Wound Retractor:

- Double Sensitive
- WS/CS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Capacity 2200mm / 1.25mm
- Webbing Guide Integral
- Weight 295g
- Cover Option:
 - Smart cover 609441600A
 - Full cover 615118400B
- Webbing Pin 10-0181-00

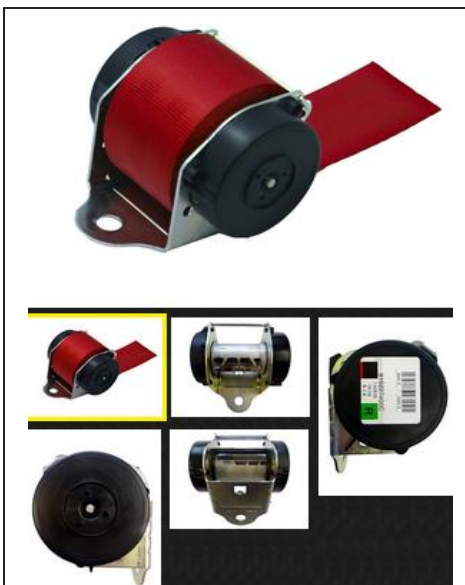


Part No: 615237400C

R27 (M1) Standard Wound Retractor:

- Double Sensitive
- WS/CS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Capacity 2200mm / 1.25mm
- Webbing Guide Integral
- Weight 295g
- Cover Option:
 - Smart cover 609441600A
 - Full cover 615118400B
- Webbing Pin 10-0181-00

Retractors

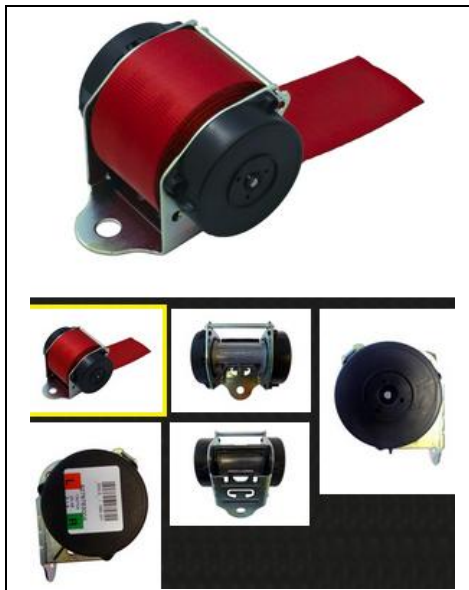

Part No: 627676300A

R27 (M1) Standard Wound Retractor:

- Double Sensitive
- WS/CS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Capacity 2200mm / 1.25mm
- Webbing Guide Integral
- Weight 295g
- Cover Option:
 - Smart cover 609441600A
 - Full cover 615118400B
- Webbing Pin 10-0181-00



Part No: 10-0167-00

Series 23 Electric Retractor:

The 12 volt retractor is not angle sensitive, it has a micro switch, when current is applied the retractor unlocks.

- Mono Sensitive
- WS
- Strength:
 - 450mm > 15KN
 - 0mm > 15KN
- Webbing Capacity 3000mm / 1.25mm
- Weight 400g
- Cover Option 50-0172-00
- Webbing Pin 10-0343-00



Part No: 10-0171-00

Webbing Mounted ALR:

ALR with slot for webbing mounting, tail can be sewn to any length to customer requirements.

Capacity 1050mm



Part No: 40-1520B

S hook produced from 10mm wire, black plastic dipped finish.

- Tensile Strength: minimum 15Kn



Part No: 40-0118-01

Snap hook

- Tensile Strength: minimum 15Kn
- Finish: Black painted
- Webbing slot width: 52mm

Version available without lever on gate, reference 40-0118-00



Part No: 40-0118-00

Snap hook

- Tensile Strength: minimum 15Kn
- Finish: Zinc painted
- Webbing slot width: 52mm

Version available with lever on gate, reference 40-0118-01



Part No: 3-02-1388

Arrow Head Tongue - Beige:

- Compatible with buckle type 5000
- Colour: Beige



Part No: 3-02-1078

Arrow Head Tongue - Black:

- Compatible with buckle type 5000
- Colour: Black



Part No: 3-02-1337

Arrow Head Tongue - Grey:

- Compatible with buckle type 5000
- Colour: Grey



Part No: 20-0945-00

K12 Adjuster Tongue:

- An adjustable tongue, commonly used on static lap belts, prevents micro slip
- Compatible with Autoliv K12G buckles



Part No: 2401-010-00A

K12 Cranked Lay Flat Tongue:

- A tongue with a 30° crank
- Designed to lay flat on webbing
- Commonly used on 3 point seat belts
- Compatible with Autoliv K12G buckle

Tongues



Part No: 20-0273

K12 Cranked Lay Flat Tongue:

- A tongue with a 30° crank
- Designed to lay flat on webbing
- Commonly used on 3 point seat belts
- Compatible with Autoliv K12G buckle



Part No: 608105300A

K12 Flat Lay Flat Tongue:

- A flat tongue
- Designed to lay flat on webbing
- Commonly used on 3 point seat belts
- Compatible with Autoliv K12G buckle



Part No: 600916800B

K12 Standard Tongue:

- A flat tongue
- Commonly used on 3 point seat belts
- Compatible with Autoliv K12G buckle



Part No: 20-0102-00

Standard Tongue:

- Standard flat tongue
- Compatible with mini buckle 20-0101-00



Part No: 6800-002-00A

Tow Strap - Black - With SBS Flash:

- Tow strap
- Colour BLACK
- Length of Webbing 215mm (140mm loop)
- Suitable for fitting to the front or rear of the car
- Fixing hole diameter 15mm
- Can be used with Shouldered Spacer 60-0286-00 (hole diameter 11.5mm)



Part No: 6800-001-00A

Tow Strap - Black - Without Flash:

- Tow strap
- Colour BLACK
- Length of Webbing 215mm (140mm loop)
- Suitable for fitting to the front or rear of the car
- Fixing hole diameter 15mm
- Can be used with Shouldered Spacer 60-0286-00 (hole diameter 11.5mm)



Part No: 6800-002-05A

Tow Strap - Red - With SBS Flash:

- Tow strap
- Colour RED
- Length of Webbing 215mm (140mm loop)
- Suitable for fitting to the front or rear of the car
- Fixing hole diameter 15mm
- Can be used with Shouldered Spacer 60-0286-00 (hole diameter 11.5mm)



Part No: 6800-001-05A

Tow Strap - Red - Without Flash:

- Tow strap
- Colour RED
- Length of Webbing 215mm (140mm loop)
- Suitable for fitting to the front or rear of the car
- Fixing hole diameter 15mm
- Can be used with Shouldered Spacer 60-0286-00 (hole diameter 11.5mm)

Tow straps



Part No: 6800-002-03A

Tow Strap - Yellow - With SBS Flash:

- Tow strap
- Colour YELLOW
- Length of Webbing 215mm (140mm loop)
- Suitable for fitting to the front or rear of the car
- Fixing hole diameter 15mm
- Can be used with Shouldered Spacer 60-0286-00 (hole diameter 11.5mm)



Part No: 6800-001-03A

Tow Strap - Yellow - Without Flash:

- Tow strap
- Colour YELLOW
- Length of Webbing 215mm (140mm loop)
- Suitable for fitting to the front or rear of the car
- Fixing hole diameter 15mm
- Can be used with Shouldered Spacer 60-0286-00 (hole diameter 11.5mm)



Part No: 30-0292

11 Panel Black:


- Seat belt webbing
- 11 panel
- Colour: BLACK
- Tensile Strength: 26.5KN
- Elongation: 8-12% (when 9.8Kn is applied over 1m length)



Part No: 30-0292-05

11 Panel Blue:


- Seat belt webbing
- 11 panel
- Colour: BLUE
- Tensile Strength: 26.5KN
- Elongation: 8-12% (when 9.8Kn is applied over 1m length)

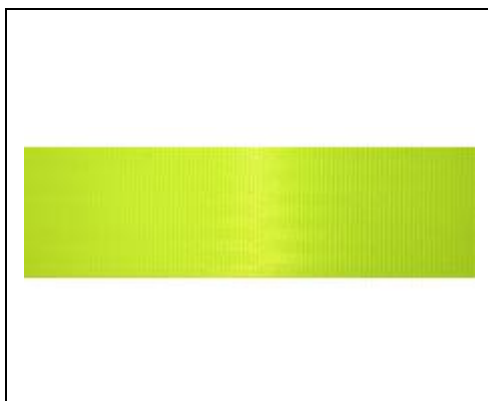

Part No: 30-0292-06

11 Panel Dayglo Yellow:

- Seat belt webbing
- 11 panel
- Colour: YELLOW
- Tensile Strength: 26.5KN
- Elongation: 8-12% (when 9.8Kn is applied over 1m length)

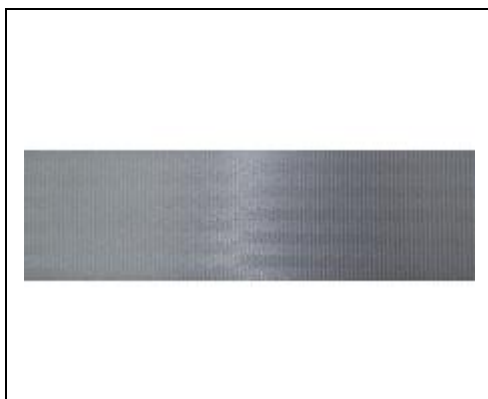

Part No: 30-0292-03

11 Panel Grey:

- Seat belt webbing
- 11 panel
- Colour: GREY
- Tensile Strength: 26.5KN
- Elongation: 8-12% (when 9.8Kn is applied over 1m length)


Webbing



Part No: 3001-010-00A

11 Panel Navy:


- Seat belt webbing
- 11 panel
- Colour: NAVY
- Tensile Strength: 26.5KN
- Elongation: 8-12% (when 9.8Kn is applied over 1m length)

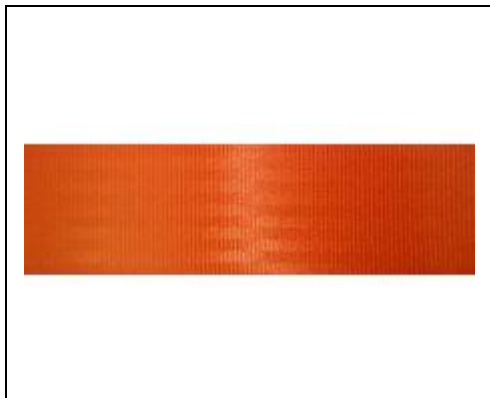

Part No: 30-0292-07

11 Panel Orange:


- Seat belt webbing
- 11 panel
- Colour: ORANGE
- Tensile Strength: 26.5KN
- Elongation: 8-12% (when 9.8Kn is applied over 1m length)

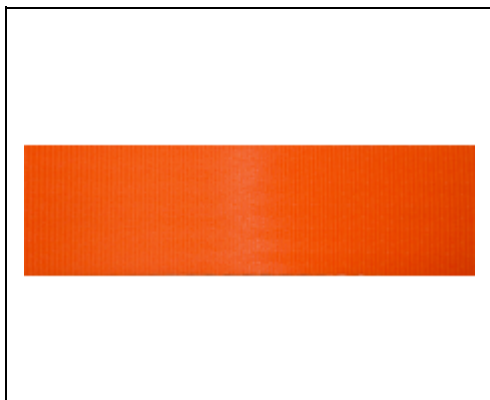

Part No: 6877.11T.ORA

11 Panel Orange:


- Seat belt webbing
- 11 panel
- Colour: ORANGE
- Tensile Strength: 26.5KN
- Elongation: 8-12% (when 9.8Kn is applied over 1m length)

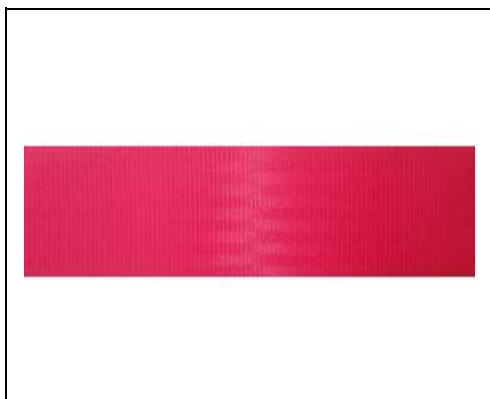

Part No: NOCODE5

11 Panel Pink:


- Seat belt webbing
- 11 panel
- Colour: PINK
- Tensile Strength: 26.5KN
- Elongation: 8-12% (when 9.8Kn is applied over 1m length)

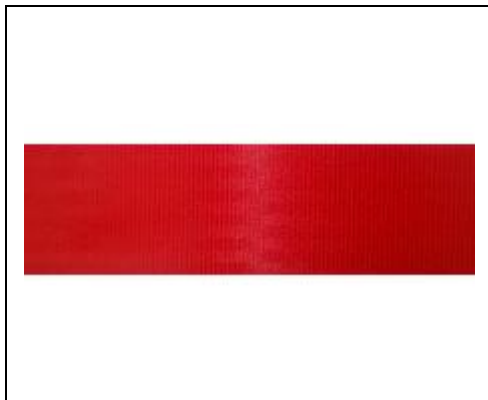

Part No: 30-1144

11 Panel Red:


- Seat belt webbing
- 11 panel
- Colour: RED
- Tensile Strength: 26.5KN
- Elongation: 8-12% (when 9.8Kn is applied over 1m length)

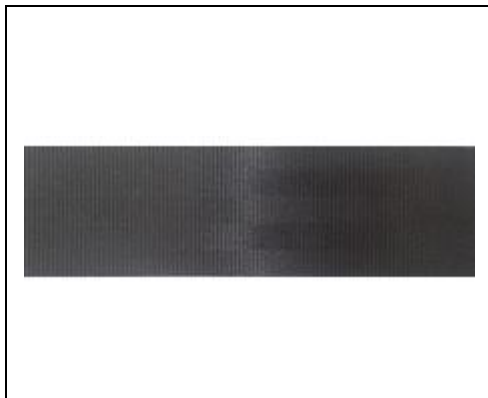

Part No: 5504524AAB

5 Panel Black (Ecotech):


- Seat belt webbing
- 5 panel
- Colour: BLACK
- Tensile Strength: 28KN
- Elongation: 8-10% (when 10Kn is applied over 1m length)

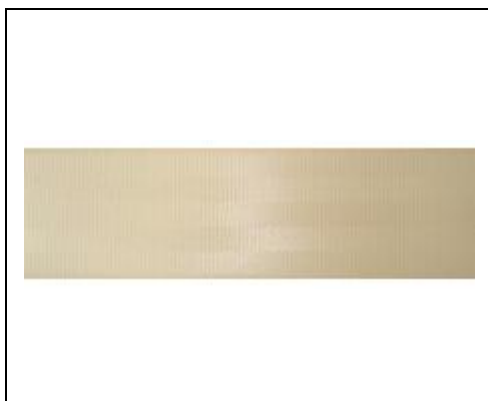

Part No: 603633500A

5 Panel Magnolia (Rukaflex):

- Seat belt webbing
- 5 panel
- Colour: MAGNOLIA
- Tensile Strength: 28KN
- Elongation: 13% (when 11.1Kn is applied over 1m length)

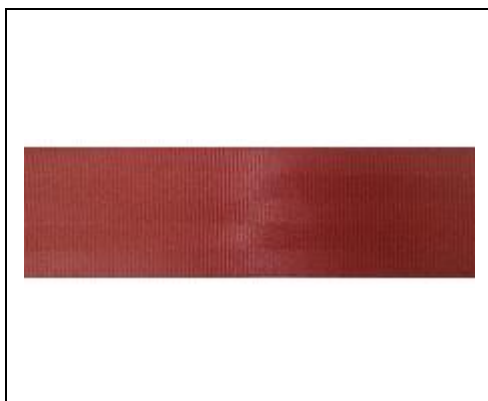


Part No: 590400046A

5 Panel Ochre (Rukaflex):

- Seat belt webbing
- 5 panel
- Colour: OCHRE
- Tensile Strength: 28KN
- Elongation: 13% (when 11.1Kn is applied over 1m length)

Webbing

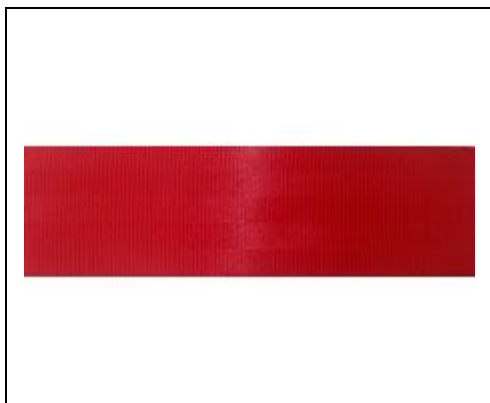

Part No: 5504524GLR

5 Panel Red (Ecotech):

- Seat belt webbing
- 5 panel
- Colour: RED
- Tensile Strength: 28KN
- Elongation: 8-10% (when 10Kn is applied over 1m length)



Part No: 30-1404-01

8 Panel Black:

- Seat belt webbing
- 8 panel
- Colour: BLACK
- Tensile Strength: minimum 25KN
- Elongation: 16-18%



Part No: 30-0334-01

8 Panel Burgundy:

- Seat belt webbing
- 8 panel
- Colour: BURGUNDY
- Tensile Strength: 25KN
- Elongation: 6-9%



Part No: 30-1404-00

8 Panel Dayglo Yellow:

- Seat belt webbing
- 8 panel
- Colour: DAYGLO YELLOW
- Tensile Strength: 25KN
- Elongation: 16-18%

Poseidonweg 39
8239 DK Lelystad

T 0320 - 28 61 71
E lelystad@auerhaan.nl
W auerhaan-lelystad.nl

Reken op ons.

